ALUMATEC PACIFIC PRODUCTS

FULL-LINE PRODUCT COLLECTION

2027

Rolling Grilles

Side-Folding Enclosures

Counter Shutters

Aluminum Shutters

QUALITY NOT COMPROMISED BY SPEED.

INDUSTRIAL / COMMERCIAL / RETAIL

ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

FULL-LINE COLLECTION

2027

TABLE OF CONTENTS

PRODUCTS FOR EVERY OPENING.

01 COMMERCIAL / INDUSTRIAL

SECTION OVERVIEW 03

REVOL II 04
Extreme high-cycle parking garage shutter

AT-9-HC / AT-9-SHC 05
High-cycle roll-up grilles

LXR-HC 06
High-cycle polycarbonate shutter

PFR-HC 07
High-cycle perforated shutter

S-2-HC 08
High-cycle solid slat shutter

02 RETAIL

SECTION OVERVIEW 09

AT-9 10
Roll-up security grille

LXR 11
Polycarbonate rolling shutter

PFR 12
Perforated rolling shutter

S-2 13
Standard-cycle solid slat shutter

03 ROLL-UP SHUTTERS

SECTION OVERVIEW 14

LIGO 15
Solid aluminum counter shutter

LIGO-PFR 16
Perforated counter shutter

AP-53 17
Insulated storefront shutter

AP-37 18
Insulated window + counter shutter

04 SIDE-FOLDING + POCKET

SECTION OVERVIEW 19

ST-12 20
Open-pattern side-folding grille

ES-18 21
Open-pattern side-folding door

PFS 22
Perforated side-folding door

LXS 23
Polycarbonate side-folding door

SAS-7 24
Solid aluminum side-folding door

Model + Panel Width Guide 25
Side-folding configurations

PD-8-SJ / PD-8-BJ / PD-8-FJ 26
Pocket door + frame configurations

BACK COVER / CONTACT INFORMATION 27

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

COMMERCIAL / INDUSTRIAL

SOLUTIONS

aluminatec

PACIFIC PRODUCTS™

alumatec
PACIFIC PRODUCTS

REVOL II

EXTREME HIGH-CYCLE PARKING GARAGE SHUTTER



OPEN-PATTERN HIGH-CYCLE CONTROL

BUILT FOR THE TRAFFIC.


Open-pattern aluminum security with direct-shaft operation for demanding parking-garage access.

VISIBILITY / AIRFLOW / DURABILITY

250K	18 IN/SEC	28 FT	350 SQ FT
PUBLISHED CYCLE LIFE	AVG. OPEN SPEED	MAXIMUM WIDTH	MAXIMUM AREA



PARKING GARAGE INSTALLATION

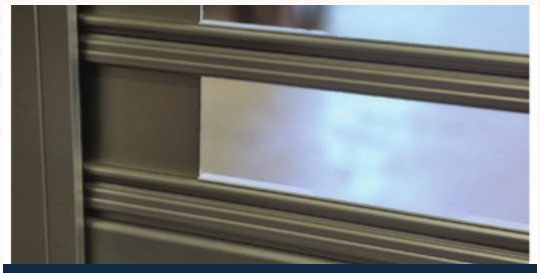

OPEN-PATTERN CURTAIN



DIRECT-DRIVE OPERATOR

STANDARD FEATURES

- Springless barrel assembly with direct shaft-mounted operator
- Open-pattern extruded 6063 aluminum curtain
- UHMW panel and hardware protector helps limit side shifting
- 3-inch high-cycle guides with felt and ABS wear strips
- Adjustable center supports within the hood enclosure

SAFETY + FINISHES

SAFETY COMPONENTS

Safety edge / NEMA-4 photo-eyes / Light curtain

FINISH SELECTION

Clear anodized standard. Dark bronze, black anodized or custom RAL powder coat available.

IDEAL APPLICATIONS

High-traffic parking garages / Controlled vehicle entrances

OPEN SECURITY. HIGH-CYCLE PERFORMANCE.

VIEW REVOL II DETAILS

Scan for current sizing, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

AT-9 HC / SHC

MOTORIZED HIGH-CYCLE ROLL-UP GRILLES



AT-9 HC — 100K CYCLE



AT-9 SHC — 300K CYCLE

HIGH-CYCLE SECURITY FOR NONSTOP ACCESS.

Motorized grille protection that preserves airflow and visibility for parking, vehicle access, and industrial traffic.

100K	300K	8-9 IN/SEC	9 IN
HC CYCLE DESIGN	SHC CYCLE CURTAIN	STANDARD SPEED	STANDARD LINK SPACING

AT-9 HC — HIGH CYCLE

- 100,000-cycle counterbalance spring assembly
- Gear-head motor operation; prep-for-motor available
- Micanan PRO-GH-VFD variable soft-start / soft-stop
- 3-inch deep high-cycle guides with ABS wear strips
- Full-width top slat for barrel connection
- Heavy-duty commercial flange bearings

AT-9 SHC — EXTREME HIGH CYCLE

- 300,000-cycle curtain design
- Sprung or springless barrel assembly options
- Nice GH-VFD or direct-drive operator options
- High-speed option: up to 18 in/sec open and 12 in/sec close
- 3-inch deep x 1/4-inch thick guides with PVC wear strips
- GAPOSA 24 RPM safety brake (not used with direct drive)

IDEAL APPLICATIONS

Parking structures
Vehicle entry / exit
Remote-access locations
Industrial traffic

VISIBILITY. AIRFLOW. DURABILITY.

COMMON BUILD + FINISHES

Copper-eyelet links with sleeved rods
9-in standard spacing; 3-in / 6-in available
Safety edge, photo-eyes, and hood cover

AVAILABLE FINISHES

Mill / Clear / Dark Bronze / Black anodized
Custom powder coating (RAL color chart)

DETAILS + DOCUMENTS

SCAN FOR HIGH-CYCLE MODELS

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

LXR-HC

HIGH-CYCLE POLYCARBONATE ROLL-UP SHUTTER



EXTERIOR HIGH-CYCLE CLOSURE

CLEAR VISIBILITY + HIGH-CYCLE PERFORMANCE

CLEAR SECURITY. BUILT FOR REPEAT USE.

LXR-HC combines a 99.9%-enclosed polycarbonate curtain with high-cycle components for exterior protection that preserves light and visibility.

99.9%	100K+	28 x 18 FT
ENCLOSED CURTAIN	MINIMUM CYCLE LIFE	MAX OPENING (W x H)

STANDARD FEATURES

- 3/32-in clear, UV-treated polycarbonate panels with a 10-year discoloration warranty
- Rigid PVC framing helps protect panels from abrasion
- 3-in-deep high-cycle guides with ABS wear strips
- High-cycle spring assembly with high-yield flange bearings
- Safety edge, FRABA NEMA-4 photo-eyes, and hood cover
- Prepared for a face-of-coil motor operator

FINISHES + OPTIONS

ALUMINUM FINISHES

Clear Class II anodized (standard)
Dark Bronze / Black anodized
White DuraCoat
Custom powder coating (RAL chart)

WINDOW + FRAME OPTIONS

Custom polycarbonate tinting
PVC frame colors: Black / Gray

IDEAL APPLICATIONS

Exterior commercial openings

Applications requiring light + visibility

Long-life, high-cycle protection

LIGHT. VISIBILITY. HIGH-CYCLE DURABILITY.

VIEW LXR-HC DETAILS

Scan for current details, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

PFR-HC

HIGH-CYCLE PERFORATED ROLL-UP SHUTTER



PERFORATED PROTECTION. CLEAN ARCHITECTURAL LINES.

BUILT FOR REPEATED USE

SECURITY. WITH AIRFLOW.

Perforated aluminum protection with partial visibility for high-use parking and commercial openings.

100,000-CYCLE DESIGN

100K	8-9 IN/SEC	3 IN
STANDARD CYCLE DESIGN	AVG. OPENING SPEED	HIGH-CYCLE GUIDE DEPTH



PARKING ACCESS PROTECTION



PERFORATION DETAIL

STANDARD FEATURES

- Perforated aluminum curtain for airflow and partial visibility
- High-cycle spring assembly and flange bearings
- 3-inch-deep guides with ABS wear strips
- UHMW panel and hardware protector
- Safety edge, FRABA photo-eyes and hood cover

OPTIONS + FINISHES

AVAILABLE OPTIONS

Front fascia cover / Faster opening package

FINISH CHOICES*

Clear, dark bronze or black anodized; custom RAL powder coating.

IDEAL APPLICATIONS

High-use parking garages / Commercial openings needing airflow and partial visibility

*Confirm finish selection when ordering.

VIEW PFR-HC DETAILS

Scan for product details and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

S-2-HC

HIGH-CYCLE SOLID SLAT SHUTTER



SOLID SECURITY. HIGH-CYCLE DUTY.

BUILT FOR GARAGE ACCESS.

Extruded aluminum security for exterior drive-through openings and residential parking garages.

Quieter operation than traditional rolling steel shutters.



SOLID SHUTTER / EXTERIOR INSTALLATION

100K	28 FT	20 FT
HC CYCLE-LIFE DESIGN	MAXIMUM WIDTH	MAXIMUM HEIGHT

HIGH-CYCLE CONSTRUCTION

- Solid, interlocking aluminum slats: 3½ in high
- Prepared to accept a high-cycle motor operator
- High-cycle, high-yield enclosed flange bearings
- 3 in deep guides with PVC wear strips
- Wind locks at every sixth panel
- Double aluminum angle bottom rail and guides

AVAILABLE FINISHES

STANDARD

Clear satin anodized finish

FINISH OPTIONS

White DuraCoat® finish

Custom RAL powder coating

IDEAL APPLICATIONS

Residential parking garages / Exterior drive-throughs / Large solid-shutter openings

SOLID PROTECTION. QUIETER OPERATION.

S-2-HC DOCUMENTATION

Scan for the supporting brochure and model cycle ratings.

ALUMATECPP.COM


OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

RETAIL
SOLUTIONS

alumatec
PACIFIC PRODUCTS™

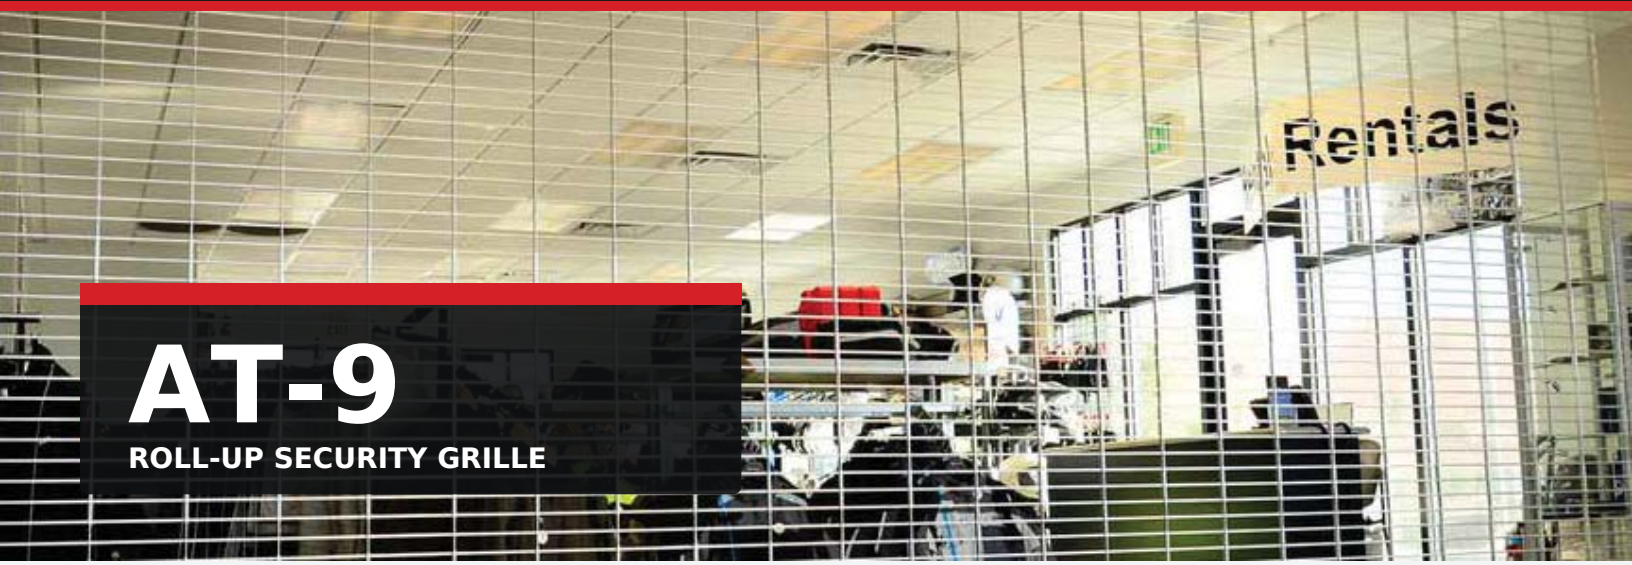

AT-9

ROLL-UP SECURITY GRILLE

SECURITY WITHOUT SACRIFICING VISIBILITY.

Protect storefronts and interior perimeters while keeping merchandise visible and airflow open. The AT-9 delivers reliable, space-saving security for daily commercial use.

STANDARD FEATURES

- Manual push-up / pull-down operation
- 2" high x 9" wide clear openings (on center)
- Mill-finished curtain
- Clear-anodized bottom bar and guide pair
- Exterior keyed cylinder; interior thumb-turn
- Mohair guide inserts reduce metal-on-metal contact
- Minimum 25,000-cycle life

AVAILABLE FINISHES

- Mill (standard)
- Clear anodized
- Dark bronze anodized
- Black anodized
- Custom powder coating



IDEAL APPLICATIONS

Retail storefronts / Malls
Airports / Hotels / Perimeters

VIEW PRODUCT DETAILS

Scan or visit alumatecpp.com

801-298-0181

alumatec
PACIFIC PRODUCTS

LXR

(POLYCARBONATE) SHUTTER



HIGH-END RETAILERS / POLYCARBONATE

SECURITY AND BEAUTY.

Alumatec Pacific Products polycarbonate style shutter is becoming more and more popular with high-end retailers looking for the added security and beauty of a full view shutter.



FULL VIEW SHUTTER

OUR LXR MODEL

Our LXR model is by far the best in the industry; manufactured using 1/16” polycarbonate (interior applications) and 3/32” polycarbonate (exterior applications).

99.9%
ENCLOSED CURTAIN

28’ × 15’
OPENINGS UP TO (WIDE × TALL)

140 SQ. FT.
MOTORS RECOMMENDED OVER

STANDARD FEATURES

- 99.9% enclosed curtain.
- Accommodates openings up to 28’ wide and 15’ tall.
- Motors are recommended on openings over 140 square feet.
- Each polycarbonate window is framed with a PVC “H” clip to prevent abrasions when rolling up and down, thus maintaining a clear view of the merchandise even after years of use.

POLYCARBONATE

1/16” polycarbonate
Interior applications

3/32” polycarbonate
Exterior applications

MAXIMUM STOREFRONT VISIBILITY

This advanced style of rolling shutter provides maximum storefront visibility for products and merchandising.

SECURITY. BEAUTY. FULL VIEW.

VIEW LXR DETAILS

Scan for product information and supporting documents.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

PFR

PERFORATED ROLLING SHUTTER




RETAIL SECURITY / PERFORATED ALUMINUM

SECURITY. WITH A VIEW.

Perforated aluminum slats balance storefront protection, visibility and airflow. Designed to resist reach-through theft and vandalism in interior and exterior applications.



STOREFRONT PROTECTION



PERF PATTERN

Original round-hole detail

0.093 IN
ALUMINUM SHEETING

¼ IN
ROUND BB HOLES

60%
TRANSPARENCY

FEATURES + OPERATION

- Perforated aluminum slats for visibility and airflow
- 0.093 in aluminum sheeting with ¼ in round BB holes
- Manual push-up / pull-down, reduced-drive chain hoist or hand crank
- Motors recommended for openings over 135 sq. ft.

AVAILABLE FINISHES

Mill (standard)

Clear anodized / Dark bronze anodized / Black anodized

Custom powder coating

IDEAL APPLICATIONS

Retail storefronts / High-end retailers / Interior and exterior openings

VISIBILITY. AIRFLOW. PROTECTION.

VIEW PFR DETAILS

Scan for product information and supporting documents.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

S-2

SOLID SLAT ROLL-UP SHUTTER



STANDARD-CYCLE SOLID SECURITY

COMPLETE CLOSURE. FOR LARGE OPENINGS.

Solid aluminum interlocking slats minimize visibility, aid airflow control and provide reach-through security for interior and exterior applications.

25,000-CYCLE DESIGN

Standard-cycle spring and bearing assemblies.

28 FT	20 FT	SOLID
MAX WIDTH	MAX HEIGHT	ALUMINUM CURTAIN

STANDARD FEATURES

- 100% enclosed curtain
- Solid extruded aluminum interlocking slats
- Openings up to 28 ft wide × 20 ft high
- Interlocking hinge system on 3½ in vertical centers
- Wind locks on every sixth slat for exterior applications
- 25,000-cycle spring and bearing assemblies
- Optional vision windows: safety glass or polycarbonate
- Motors recommended for openings over 150 sq. ft.

FINISHES + OPTIONS

AVAILABLE FINISHES

Clear satin anodized (standard)

Black or bronze anodized; custom RAL powder coating.

OPERATION OPTIONS

Push-up / Hand chain / Awning crank / Motor

LOCKING OPTIONS

Bottom-bar cylinder lock or self-locking motor operator.

IDEAL APPLICATIONS

Stadiums / Schools / Hospitals / High-end retail / Interior and exterior openings

SECURITY THAT CLOSES THE OPENING.

VIEW S-2 DETAILS

Scan for product details and supporting documents.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

ROL-UP SHUTTERS

alumatec
PACIFIC PRODUCTS™

alumatec
PACIFIC PRODUCTS

LIGO

SOLID ALUMINUM COUNTER SHUTTER



COMPACT COUNTER INSTALLATION

COMPACT COMMERCIAL CLOSURE

SOLID SECURITY. COMPACT BY DESIGN.

Solid interlocking aluminum slats provide full closure in a compact shutter built for flexible mounting and straightforward installation.

0.056 IN	8 IN	3 WAYS
ROUND ALUMINUM SLAT	STANDARD HEAD PLATES	MOUNTING CONFIGURATIONS



COUNTER SHUTTER INSTALLATION



DUAL SHUTTER INSTALLATION

STANDARD FEATURES

- Fully enclosed curtain of solid, interlocking aluminum slats
- H-guide supports face-of-wall, between-jamb, or self-supporting mounting
- Coil plates mount behind the guide line for operating-device clearance
- Manual push-up / pull-down operation available up to 50 square feet
- Door can ship fabricated around the barrel; hood attached when jobsite conditions permit
- Compact construction supports a simpler, faster installation

OPTIONS + FINISHES

OPERATION OPTIONS

Manual / Sprung / Crank gear

Internal motor + hand-crank override

AVAILABLE FINISHES

Clear anodized (standard)

Bronze / White / Black DuraCoat

Custom powder coating (RAL chart)

IDEAL APPLICATIONS

Countertops / Storefronts / Behind-glass security

Self-supporting storefront conditions

FULL CLOSURE. MINIMAL HEADROOM.

VIEW LIGO DETAILS

Scan for current sizing, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

LIGO-PFR


PERFORATED COUNTER SHUTTER



PRECISION-PERFORATED SECURITY

THE POWER OF VISIBILITY. THE CONFIDENCE OF SECURITY.

LIGO-PFR combines micro-perforated slats with compact roll-up security, maintaining retail visibility, ventilation, and a clean design aesthetic.

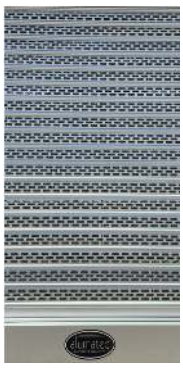

MICRO-PERFORATED SLAT DETAIL



01

PRECISION VISIBILITY

Micro-perforated slats maintain clear sightlines to merchandise and interiors.

02

SECURE VENTILATION

Increased airflow compared with traditional solid shutter designs.

03

COMPACT HOUSING

A space-saving profile designed to preserve valuable overhead room.

PRODUCT HIGHLIGHTS

- Precision micro-perforated slats
- Next-generation solid-slat technology
- Enhanced retail visibility
- Elevated design aesthetics
- Distinctive roll-up shutter design

ADDITIONAL ADVANTAGES

- Sustainable design
- Eco-friendly product
- Increased airflow over solid shutters
- Compact, space-saving housing

PRODUCT DETAILS

VIEW LIGO-PFR DETAILS

Scan for current details, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

INSULATED SECURITY CLOSURES

ROLL-UP SHUTTER / STOREFRONT



AP-53

INSULATED STOREFRONT SHUTTER

Compact winding for storefronts, counters, and smaller openings.

18 FT	178 SQ FT	0.55 IN
MAXIMUM WIDTH	MAXIMUM AREA	NOMINAL SLAT THICKNESS



EXTERIOR INSTALLATION



HEAD-PLATE DETAIL



COUNTER APPLICATION

STANDARD FEATURES

- Double-wall insulated aluminum slats with high-density foam core
- Compact winding designed for reduced housing sizes
- Guide design supports multiple mounting configurations
- Square or front-coffered head-plate choices
- Low-profile locking bottom bar
- Ships fully assembled with quiet, smooth-running operation

*Fully assembled up to 9'-9" wide or 80 sq./ft. total

OPTIONS + FINISHES

OPERATION OPTIONS

Manual / Hand crank
Chain hoist / Internal-mount motor

AVAILABLE FINISHES

Clear anodized / White / Silver
Custom powder coating (RAL chart)

IDEAL APPLICATIONS

Behind-glass storefronts / Counter and bar-top openings

Retail and commercial interiors

COMPACT. INSULATED. READY TO INSTALL.

VIEW AP-53 DETAILS

Scan for current details, drawings and coil chart.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

AP-37

INSULATED WINDOW + COUNTER SHUTTER



SLIM INSULATED SECURITY

PROTECTION THAT FITS THE OPENING.


A compact double-wall aluminum shutter for windows, counters and behind-glass applications where every inch matters.

INTERIOR OR EXTERIOR APPLICATIONS

9 FT 6 IN	11 FT 6 IN	5/16 IN	6½" - 8"
MAXIMUM WIDTH	MAXIMUM HEIGHT	NOMINAL SLAT THICKNESS	HEAD-PLATE RANGE



EXTERIOR WINDOW

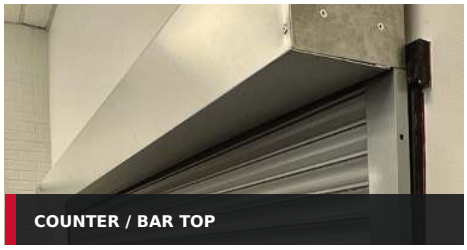

COUNTER / BAR TOP



BEHIND-GLASS SECURITY

STANDARD FEATURES

- Insulated, roll-formed double-wall aluminum slats
- Slim profile supports tight winding and a small concealed coil housing
- Guide design accommodates multiple mounting configurations
- Hidden ceiling stop within the guide and optional interior slide lock
- Weather-resistant, colorfast surface with quiet, smooth operation
- Ships completely assembled to simplify installation

OPTIONS + FINISHES

OPERATION OPTIONS

Manual push-up / pull-down
Crank gear / Chain hoist
Internal-mount motor operator

FINISH + SECURITY OPTIONS

White / Almond / Black DuraCoat
Custom RAL powder coat / Anti-lift device

IDEAL APPLICATIONS

Window protection / Small storefronts / Kiosks
Counter and bar tops / Behind-glass security

COMPACT SECURITY. MAXIMUM USABLE SPACE.

VIEW AP-37 DETAILS

Scan for current sizing, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS™

SIDE FOLDING

alumatec
PACIFIC PRODUCTS

ST-12

OPEN-PATTERN SIDE-FOLDING GRILLE



OPEN-PATTERN SECURITY / RESTAURANT INSTALLATION

12 IN	MANUAL	NO FLOOR TRACK
VERTICAL APERTURE	SIDE-FOLDING OPERATION	CLEAR FLOOR AREA



OPEN THE SPACE. KEEP THE SECURITY.

Folds neatly to the side when open. Preserves light, airflow and merchandise visibility when closed.

STANDARD FEATURES

- Double-action hinges and sleeved aluminum rods
- Adjustable roller stems help maintain clearances
- Keyed cylinder locking for interior or exterior access
- Straight and curved layouts; custom curves available

OPTIONS + FINISHES

Clear anodized standard; dark bronze, black or custom RAL powder coating.

4.5, 7 and 12 in panel configurations. Additional locking options available.

IDEAL APPLICATIONS

Malls / Retail storefronts / Restaurants / Offices / Curved openings

FLEXIBLE LAYOUTS. OPEN VISIBILITY.

VIEW ST-12 DETAILS

Scan for product details, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181


SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

ES-18

OPEN-PATTERN SIDE-FOLDING DOOR

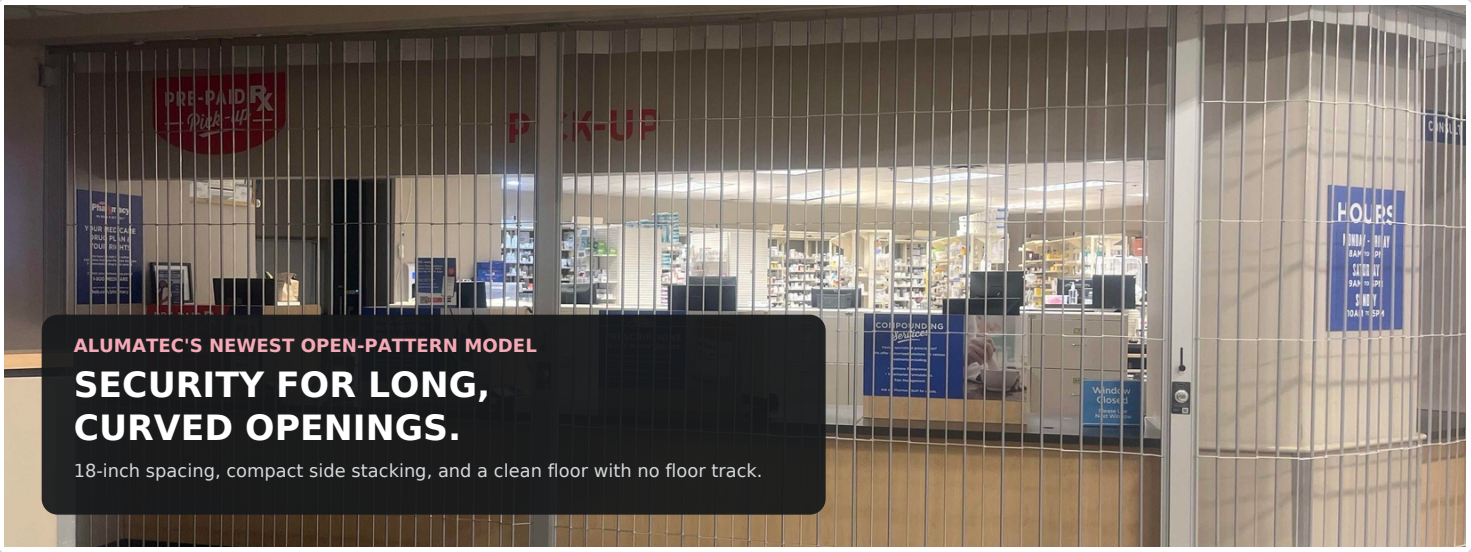

ALUMATEC'S NEWEST OPEN-PATTERN MODEL

SECURITY FOR LONG, CURVED OPENINGS.


18-inch spacing, compact side stacking, and a clean floor with no floor track.


18 IN	NO	2
OPEN APERTURE	FLOOR TRACK	LINK PATTERNS

STANDARD FEATURES

- 5/16-inch sleeved rods
- 1/8-inch thick single aluminum links
- Manual push/pull side-folding operation
- V3 top track with roller wheel bearings
- Standard 30, 45, and 90 degree curves with a 14-inch radius
- Hook-lock, bi-parting, and intermediate locking options
- Pre-hung pocket door and frame available

PATTERNS + FINISHES





PANEL CONFIGURATIONS

Straight Lattice (SL) / Brick (BP)

FINISHES

Mill standard / Clear / Dark Bronze
Black anodized / Custom powder coating

IDEAL APPLICATIONS

Storefronts / Limited headroom

Curvilinear openings / Track-free floors

SECURITY THAT FOLLOWS THE ARCHITECTURE.

VIEW ES-18 DETAILS

Scan for current details, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

PFS

PERFORATED SIDE-FOLDING ACCORDION DOOR

SECURITY WITH A VIEW.


Perforated aluminum protection that keeps merchandise visible and allows airflow.



CURVED STOREFRONT INSTALLATION



PANEL + LOCKING DETAIL

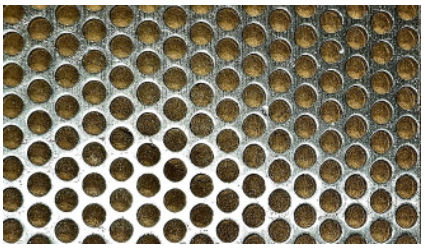

PERF PATTERN

Round-hole perforations provide visibility and ventilation while helping limit reach-through access.

PERFORATED ALUMINUM / ENLARGED DETAIL

STANDARD FEATURES

- Perforated aluminum panels in an accordion-style door
- Adjustable roller bearings and stems help maintain clearances
- Zinc-plated stem bolts
- Straight or curved layouts; custom curves available
- For interior and exterior applications

OPTIONS + FINISHES

FINISH CHOICES

Clear anodized standard. Dark bronze, black or custom RAL powder coating for frames and perforated inserts.

ADDITIONAL OPTIONS

Custom curves / Locking options

IDEAL APPLICATIONS

Retail storefronts / Merchandise displays / Interior and exterior openings

VISIBILITY. AIRFLOW. PROTECTION.

VIEW PFS DETAILS

Scan for product details, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181


SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

LXS

POLYCARBONATE SIDE-FOLDING DOOR

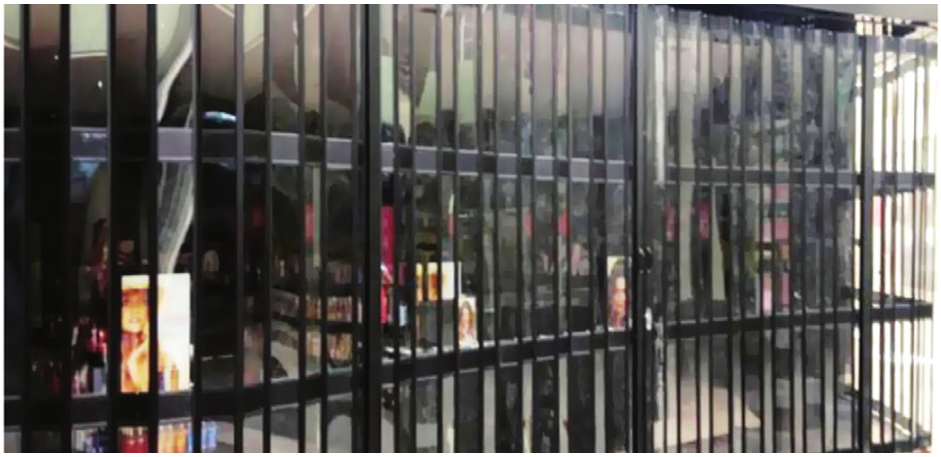

SECURITY + STOREFRONT VISIBILITY

CLEAR SECURITY. CLOSED PROTECTION.

A glazed accordion curtain that protects the opening while keeping merchandise visible.

MANUAL PUSH / PULL OPERATION

99.9%	16 FT	4.5 / 7 / 12 IN
ENCLOSED CURTAIN	MAXIMUM HEIGHT	PANEL WIDTHS



FULL-HEIGHT INTERIOR CLOSURE

STANDARD FEATURES

- Abrasion-protected framed panels help preserve a clear view
- 1/16-inch polycarbonate for interior applications; 3/32-inch for exterior applications
- Extruded aluminum interlocking hinge construction
- 14-inch radius at 30, 45, or 90 degrees; custom continuous curves available
- Top-hung, manual side-folding operation with no floor track

CONFIGURATIONS + FINISHES

PANEL + LOCK OPTIONS

4.5 in / 7 in / 12 in panel configurations

Hook / drop / bi-parting / top-and-bottom locking

Free-floating pocket or stationary wall mullion

AVAILABLE FINISHES

Polycarbonate: Clear / White / Dk. Bronze / Black

Aluminum: Clear / Bronze / Black

Custom powder coating available (RAL chart)

IDEAL APPLICATIONS

Storefronts / Retail displays / Interior separation

Straight or curved openings / Clean, visible closures

VISIBILITY WITHOUT THE REACH-THROUGH.

VIEW LXS DETAILS

Scan for current details, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

SAS-7

SOLID ALUMINUM SIDE-FOLDING DOOR

SOLID SECURITY. PRIVATE BY DESIGN.

Solid aluminum panels help protect storefront glass and conceal inventory. Manual horizontal folding keeps overhead space requirements low.



OPEN / STACKED AT THE SIDES



CLOSED / SOLID-PANEL PRIVACY

7 IN	MANUAL	SOLID
STANDARD PANEL WIDTH	SIDE-FOLDING OPERATION	ALUMINUM PANEL DESIGN

STANDARD FEATURES

- Solid aluminum panels provide visual privacy and help prevent reach-through access
- Manual side-folding operation for storefront openings
- Exterior keyed cylinder with interior thumb-turn locking
- Top-track system with adjustable rollers and stems
- Storefront mullion-mounted L-bracket for standalone installations
- Straight layouts and curved track configurations

OPTIONS + FINISHES

STANDARD FINISH

Clear Class II anodized aluminum.

FINISH OPTIONS

Dark bronze or black anodized; custom RAL powder coating.

CONFIGURATION OPTIONS

Custom curves / Bottom rubber seal

IDEAL APPLICATIONS

Retail storefronts / Glass-front protection / Inventory concealment

PROTECTION WITH VISUAL PRIVACY.

VIEW SAS-7 DETAILS

Scan for product details, drawings and specifications.

ALUMATECPP.COM

OFFICE
801-298-0181


SERVICE
877-770-0181

WEB
ALUMATECPP.COM

SIDE FOLDING MODEL NUMBERS & PANEL WIDTHS AVAILABLE IN EACH MODEL


LXS (polycarbonate)

LXS-4.5 LXS-7 LXS-13

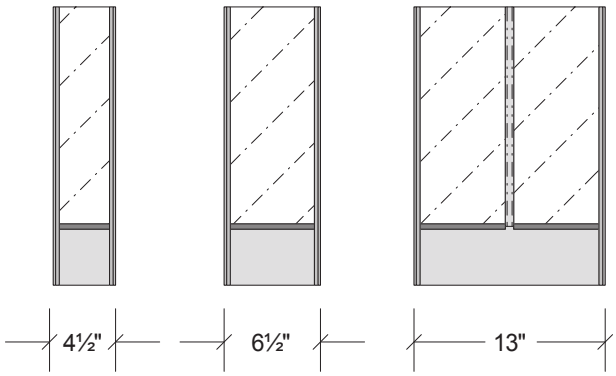


SAS (solid)

SAS-4.5 SAS-7 SAS-13

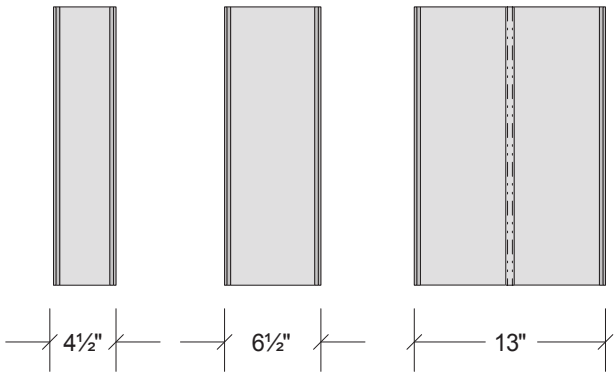


PFS (perforated)

PFS-4.5 PFS-7 PFS-13

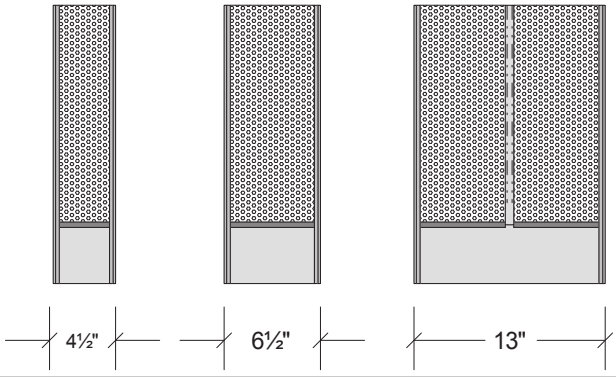

ST-12 (open pattern)

ST-12-7 ST-12-13

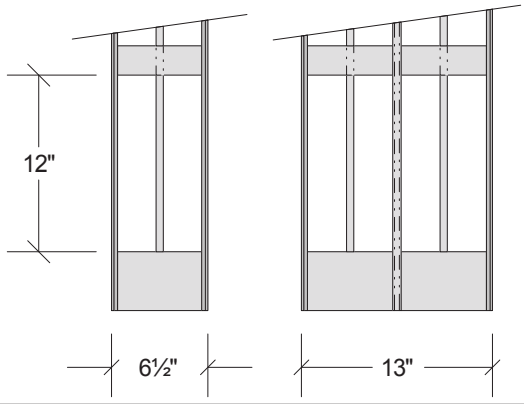

alumatec PACIFIC PRODUCTS™

POCKET DOOR & FRAME

PD-8-SJ / PD-8-BJ / PD-8-FJ



FLUSH-HANDLE INSTALLATION

CONCEAL. PROTECT. FINISH.

A CLEAN FINISH. A SECURE POCKET.

Pre-hung pocket door and frame units conceal and protect a retracted side-folding security gate.

THREE DISTINCT JAMB MODELS

Select the frame configuration to suit the pocket opening and surrounding construction.

RETAIL / AIRPORTS / HOSPITALS

LOCKING EXAMPLES



BRONZE / LOCKING



WHITE / LOCKING


Finish examples; not model identifiers.

CHOOSE YOUR JAMB CONFIGURATION

PD-8-SJ

STANDARD JAMB

Standard pocket-frame layout.




Also offered for a 90-degree pocket.

PD-8-BJ

BETWEEN JAMB

Door fits between the jambs.

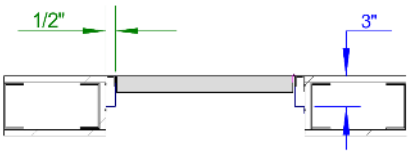

Dedicated between-jamb profile.

PD-8-FJ

FLUSH JAMB

Flush-jamb frame configuration.



Dedicated flush-jamb profile.

Manufacturer plan details shown; not to scale. Confirm dimensions and handing on the project take-off.

FEATURES + SIZING

Pre-assembled unit / Commercial-grade hinges

Frame height up to 144 in; 10 in or 14 in pockets. Custom sizing available.

Custom powder-coated finishes available.

HARDWARE + FINISH CHOICES

Pull handle or knob / Magnetic closure / Keyed hook lock configurations

BEST 7-Pin, U-Change, Schlage I.C. options. Finish and hardware selected for the project.

SPECIFY THE RIGHT FIT

Confirm jamb type, opening size, material, handing and locking on the Pocket Door & Frame take-off.

VIEW POCKET DOOR DETAILS

Scan for product information.

ALUMATECPP.COM

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM

alumatec
PACIFIC PRODUCTS

INDUSTRIAL / COMMERCIAL / RETAIL

THE RIGHT CLOSURE. FOR YOUR OPENING.

Rolling grilles. Side-folding enclosures. Counter shutters. Aluminum shutters.

ALUMATEC PACIFIC PRODUCTS

1155 West 500 North
Centerville, Utah 84014

QUALITY NOT COMPROMISED BY SPEED

Explore the product line at ALUMATECPP.COM

EXPLORE ONLINE

SOLUTIONS FOR

SECURE SPACES.

OFFICE
801-298-0181

SERVICE
877-770-0181

WEB
ALUMATECPP.COM