



Alumatec Pacific Products™

www.alumatecpp.com

Product Data Sheet

S Series

PFS-7

PRODUCT DATA

Max Width	150 ft.	45.72
Max Height	19 ft.	5792
Panel Width	7"	177.8
Minimum Pocket Width	8"	203.2
Weight stacked	8.50 lbs./ft.	3.86kg./M
Weight extended	1.90 lbs./ft.	0.862kg./M
Curtain type	Perforated pattern 51% open (Round hole)	
Simple Stack Formula	2" per every 12" of opening width	


FINISH OPTIONS



CLEAR



DK. BRONZE



BLACK




POWDER COAT

CURVE (RADIUS) DATA

P/N: V290




P/N: V245

P/N: V230

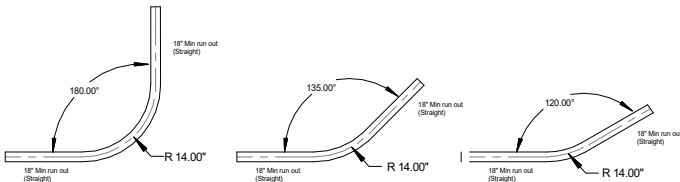

RADIUS	OPPOSITE	14"
90° Degree	180°	●
45° Degree	135°	●
30° Degree	120°	●
Custom	Contact factory with details	


R-90° Radius inside pocket

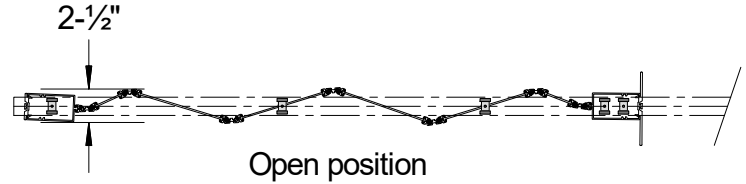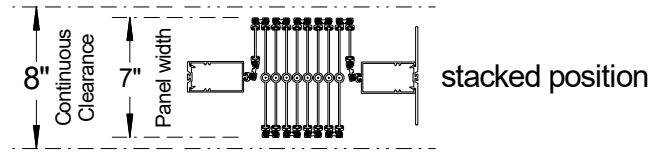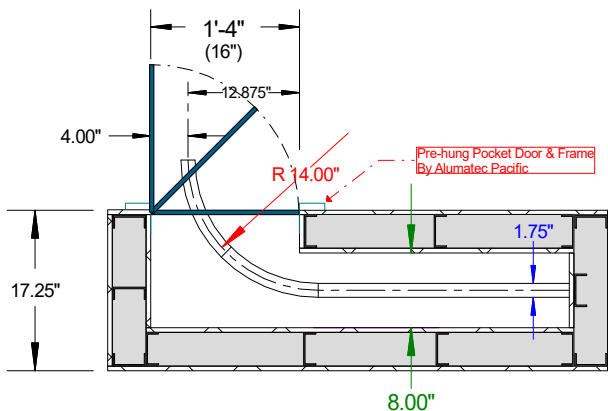

TOP TRACK

V2 top track 1.69 (w) by 1.588 (h)
with Ø1-1/8 x 1-1/8" wide roller wheel bearing

V3 top track 1.50 (w) by 1.50 (h)
with Ø1-1/8 x 3/4" wide roller wheel bearing

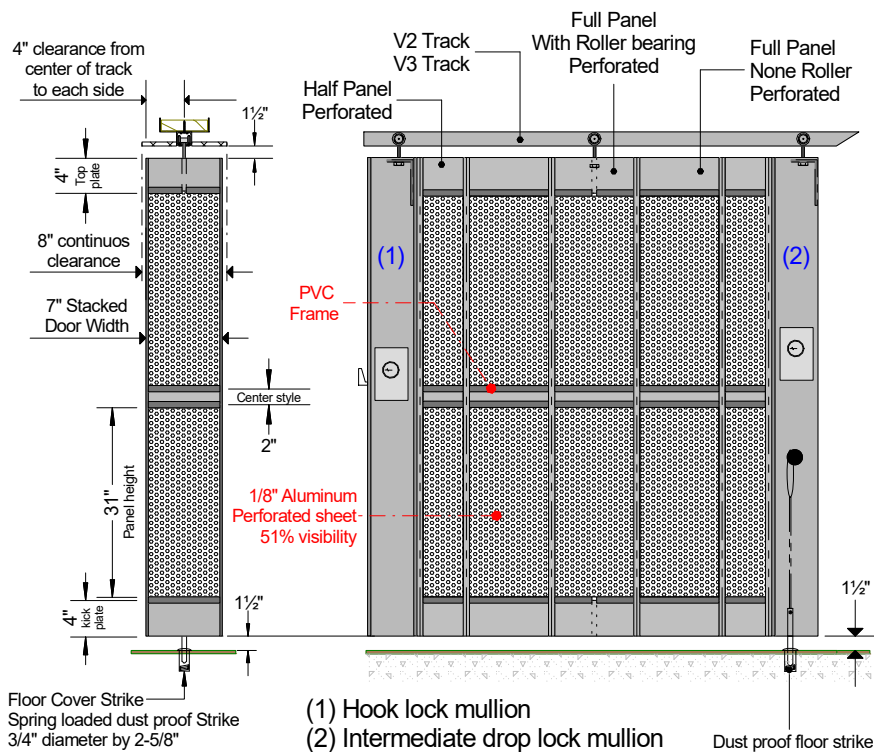

- (1) Hook lock mullion
- (2) Intermediate drop lock mullion
- (4) Top & Bottom locking mullion
- (3) Bi-parting locking mullions
- (5) Free-floating trailing edge mullion
- (st) Stationary mullion (wall connected)

Straight Shot into pocket

