



Alumatec Pacific Products™

www.alumatecpp.com

Product Data Sheet


S Series

SAS-7

PRODUCT DATA

Max Width	100 ft.	30.48 M
Max Height	19 ft.	5.79 M
Panel Width	7"	177.8 mm
Minimum Pocket Width	8"	203.2 mm
Weight stacked	8.50 lbs./ft.	3.86kg./m
Weight extended	1.90 lbs./ft.	0.862kg./m
Curtain type	Clear window closed pattern	
Simple Stack Formula	2" per every 12" of opening width	

FINISH OPTIONS

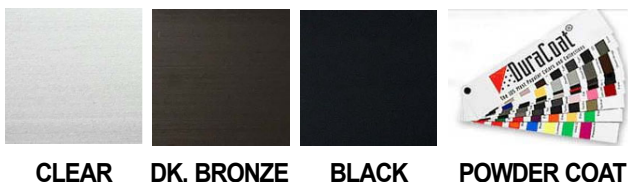


CURVE (RADIUS) DATA

P/N: V290



P/N: V245

P/N: V230

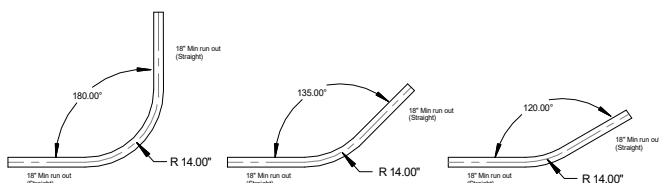


RADIUS	OPPOSITE	14"
90° Degree	180°	●
45° Degree	135°	●
30° Degree	120°	●
Custom	Contact factory with details	


R-90° Radius inside pocket

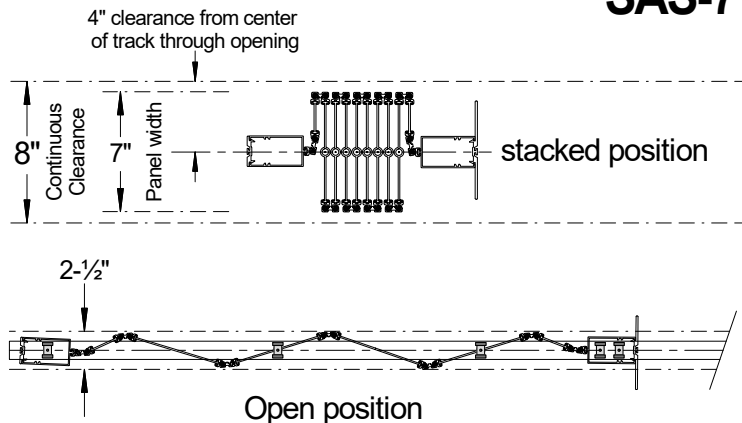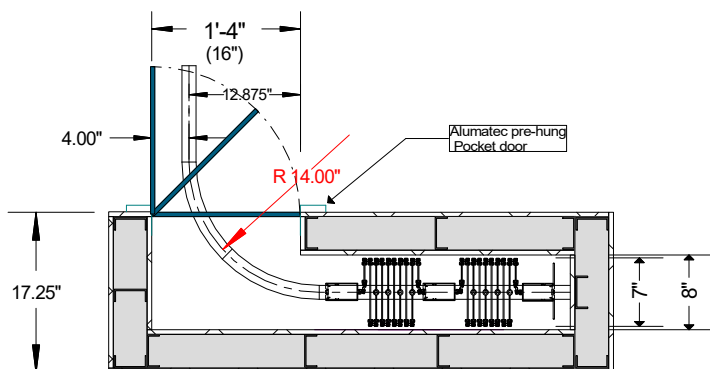


TOP TRACK



V2 top track 1.69 (w) by 1.588 (h)
with Ø1-1/8 x 1-1/8" wide roller wheel bearing



V3 top track 1.50 (w) by 1.50 (h)
with Ø1-1/8" x 3/4" wide roller wheel bearing

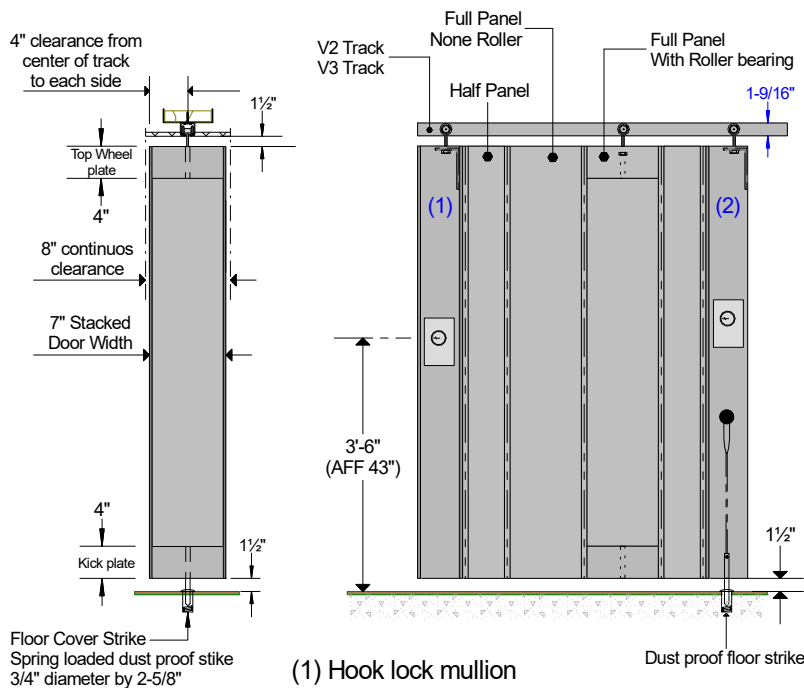

- (1) Hook lock mullion
- (2) Intermediate drop lock mullion
- (4) Top & Bottom locking mullion
- (5) Free-floating trailing edge mullion
- (st) Stationary mullion (wall connected)

Straight Track into pocket

